

ETF XL LAMINATE FLOORING

TECHNICAL SPECIFICATIONS

- ✓ German Click System
- ✓ Quick & Easy to Install
- ✓ 24 Hours Water Resistant
- ✓ Durable and Colour & Pattern Consistent

DIMENSION

1515 X 196 X 12mm

INSTALLATION METHOD

Floating Floor

SLIP RATING

AS 4586 (2013) Slip Resistance Classification of new Pedestrian Surface Materials

Wet Pendulum Test Method
Achieved a pass of P2

FIRE RATING

(CHF) Critical Heat / Radiant Flux
(AS ISO 9239.1:2003)

Pass the 9239.1 standards as required by the Australian National Construction Code

PRODUCTION METHOD

German Manufacturing Technology

ENVIRONMENTAL & QUALITY CERTIFICATES

E0 EN Emission Approved
ISO 14001:2015 Environmental System Approved
ISO 9001:2015 Quality System Approved

WARRANTY


25 Years Residential Use & 5 Years Commercial Use
(Please refer to the ETF Laminate product warranty)

ABRASION CLASS

AC4 refers to the EU Standard for the wear layer scratch resistance

ETF LAMINATE CROSS SECTION

- 1 Aluminium Oxide Protective Wear Layer
- 2 Decorative Photographic Layer
- 3 High Density Fiber Core with German Click system
- 4 Composite Backing (Protect & Improve Structural Stability)

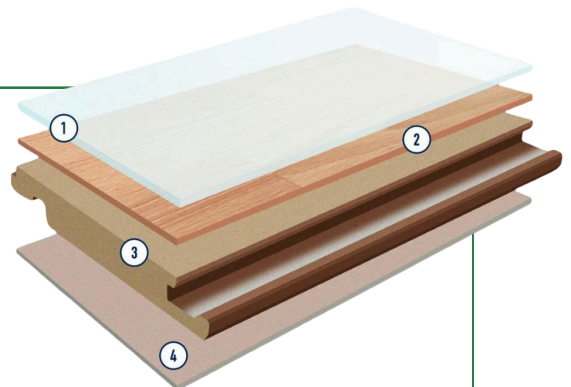

Environmentally
Friendly



Easy to
Maintain



Abrasion
Resistant



Impact
Resistant



UV
Resistant



Stain
Resistant



Resistant to
Household
Chemicals



Resistant to
Cigarette Burns

Note: Colour variation from the actual product to the electronic and printed media is to be expected.
For detailed maintenance & Installation guidelines, please refer to the website



UNICLIC®
PATENTED TECHNOLOGY